


Block course on Computational Neuroscience, Fall 2011
ETH course number 551-0335-00L

Neuromorphic Engineering, with Biological and Silicon Retinas


Tobi Delbruck
Inst. of Neuroinformatics
UZH-ETH Zurich

1 9/22/2011 ©Tobi Delbruck, 2011


The Physiologist's Friend Chip

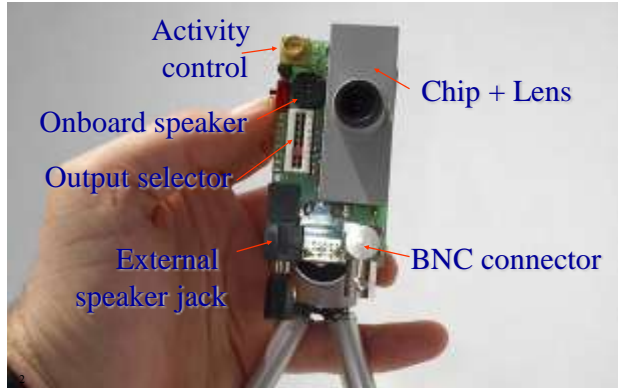


Temporal Contrast Dynamic Vision Sensor (DVS)



1. This silicon retina **asynchronously** outputs **pixel address-events**.
2. Each event represents a fixed **temporal contrast** ($\Delta \log I$), corresponding to change in scene reflectance.



1. Models transient pathway in retina.
2. Reduces redundancy
3. Responds quickly and preserves timing
4. Has wide dynamic range



3 4

Neuromorphic Electronics?


What is it all about?

The context, of silicon electronics with synchronous logic



5 6

•1947




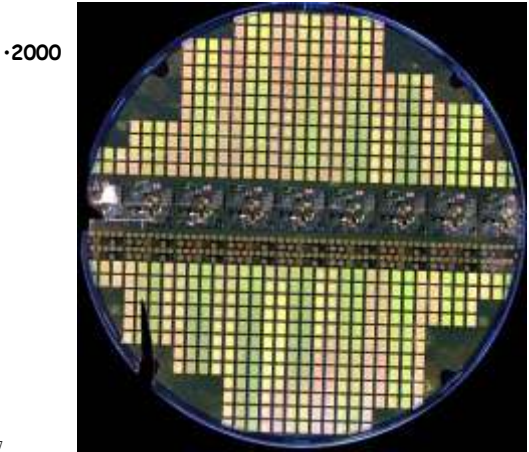

Synchronous logic is ubiquitous

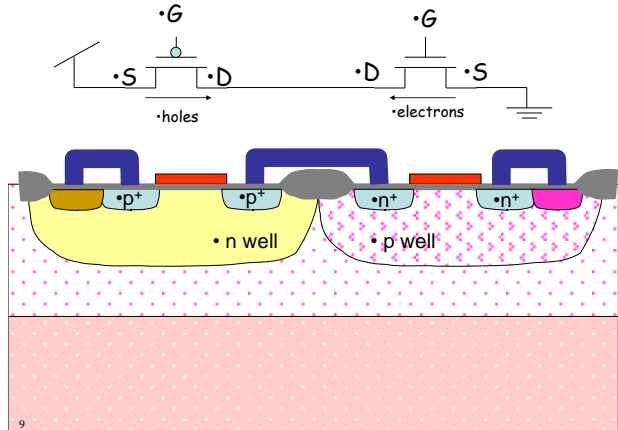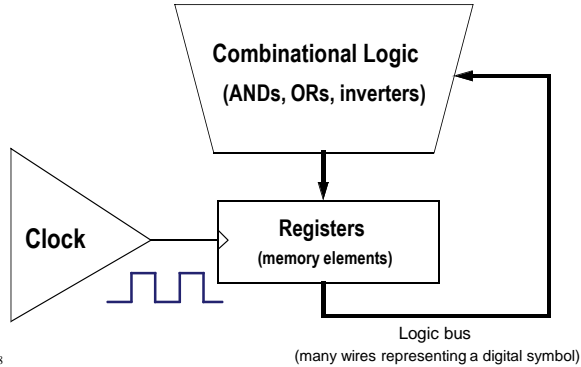

Artificial real-world computation (or: How industry thinks of analog)

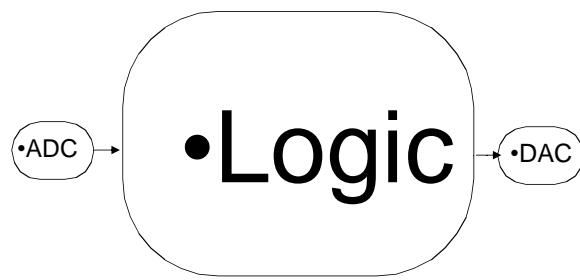

The motivation

11

•Natural computation



- Flies acrobatically
- Recognizes patterns
 - Navigates
 - Forages
 - Communicates

• 10^{-15} J/op


•Digital silicon 10^{-7} to 10^{-11} J/op

• 10^8 to 10^4 times as efficient as digital silicon


12

•Computer vs. Brain

•Pentium 4




•Cortex
•1mm



•Anderson et al. 2003

At the system level, brains are about 1 million times more power efficient than computers. Why?	
Cost of elementary operation (turning on transistor or activating synapse) is about the same. It's not some magic about physics.	
Computer	Brain
Fast global clock	Self-timed
Bit-perfect deterministic logical state	Synapses are stochastic! Computation dances: digital→analog→digital
Memory distant to computation	Memory at computation
Fast high precision power hungry ADCs	Low precision adaptive data-driven quantizers
Devices frozen on fabrication	Constant adaptation and self-modification

13

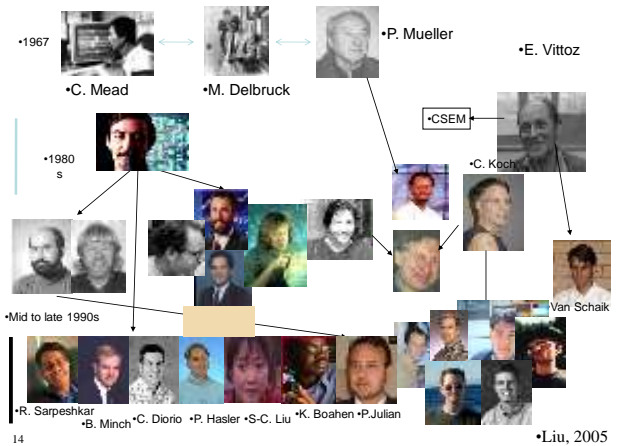


Carver Mead (Caltech) talks about progress in neuromorphic engineering 10 years after starting




The fact that we can build devices that implement the same basic operations as those the nervous system uses leads to the inevitable conclusion that we should be able to build entire systems based on the **organizing principles** used by the nervous system.

C. Mead, Proc. IEEE, 1990

16

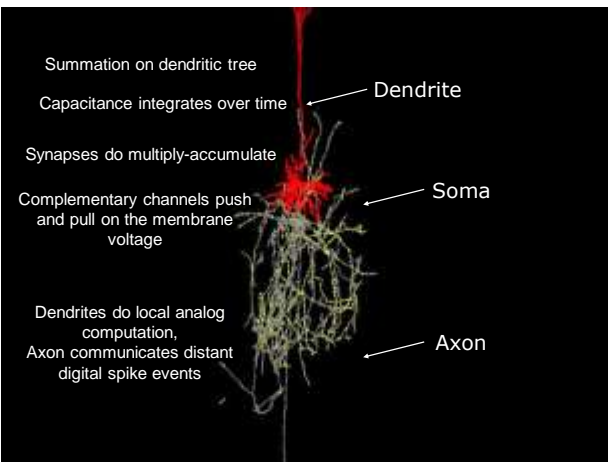


The membrane voltage is controlled by complementary voltage gated channels

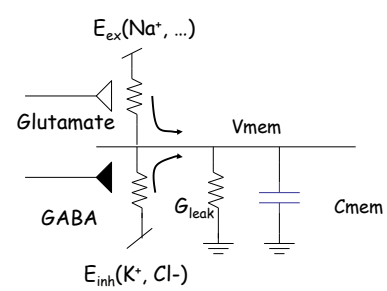

Almost no power is burned when both channels are off!

18

CMOS (complementary metal oxide semiconductor)

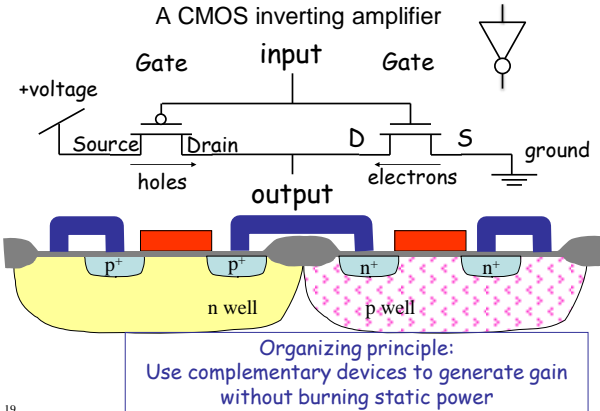


19

Interlude on semiconductors and transistors

20

The silicon lattice with an electron donor atom

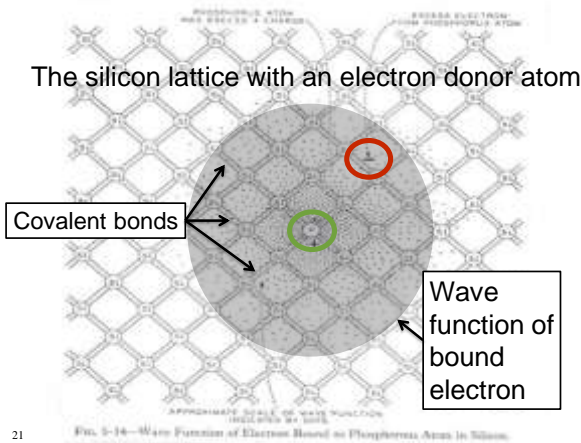

21


Donors and Acceptors in the periodic table

I	II	III	IV	V	VI	VII	Zero
H							He
Li	Be	B	C	N	O	F	Ne
Na	Mg	Al	Si	P	S	Cl	Ar
K	Zn	Ga	Ge	As	Se	Br	Kr
Rb	Cd	In	Sn	Sb	Te	I	Xe

↑ Acceptors (missing electron) | ↑ Donors (extra electron)


22

A P-N junction

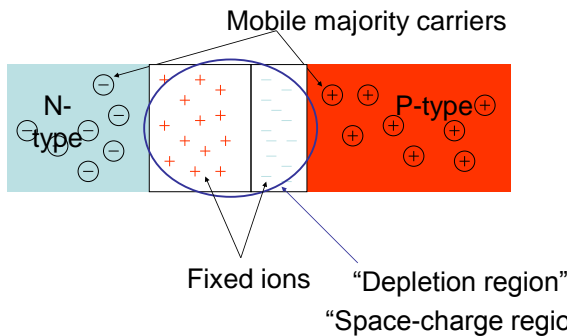


23

A P-N junction

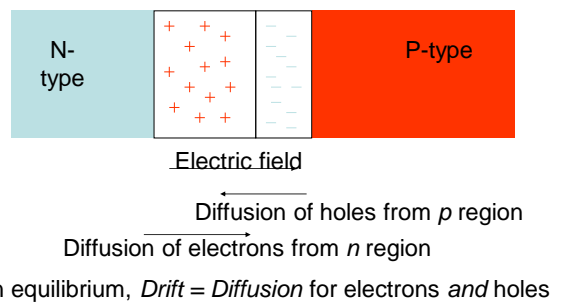

24


Charges, fields, and potentials in a PN junction

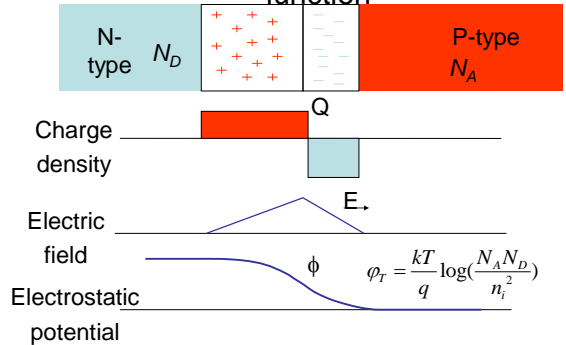





Typically, the built-in voltage, ϕ_T , is about 0.75V

25


MOS transistors use insulated gates to control barrier energies at PN surface junctions at source and drain

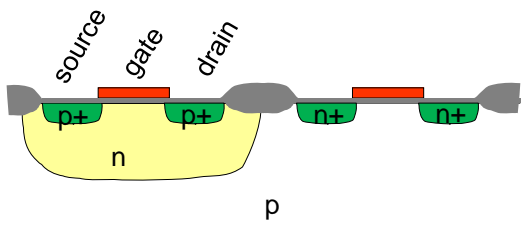

26

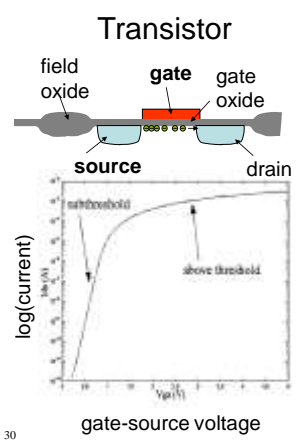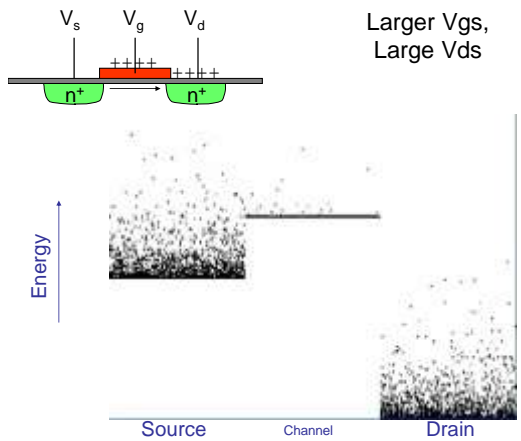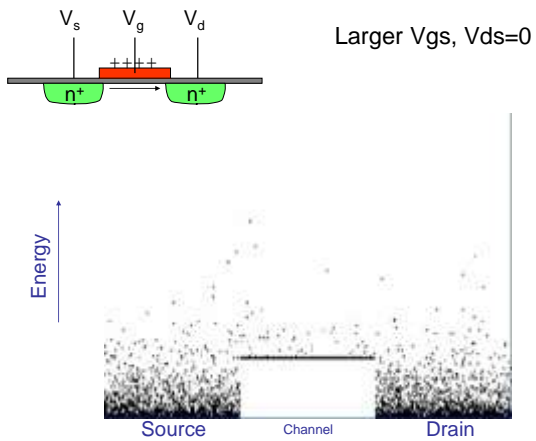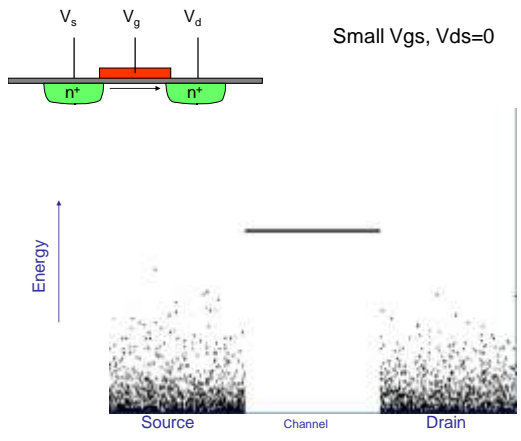

30

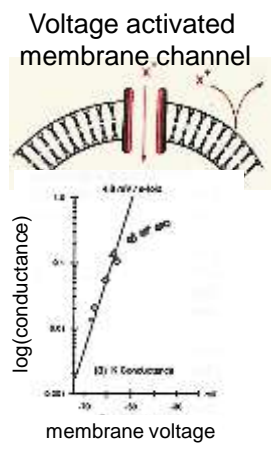

Mechanism of gain


Voltage sensitive channel conductance is exponential in membrane voltage	Transistor current is exponential function of gate voltage
<p>Organizing principle: Use controlled energy barriers (with Boltzmann energy distributions) to amplify</p>	

31


Biological and silicon retinas

32


How do we see?

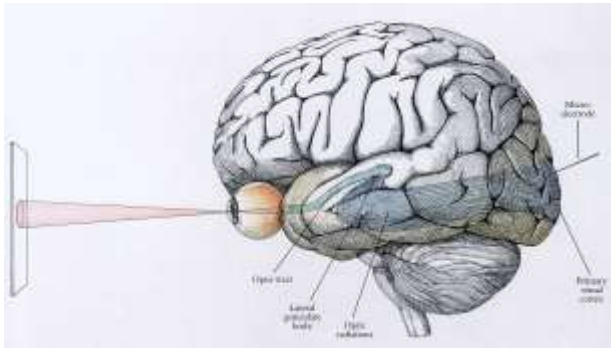


33

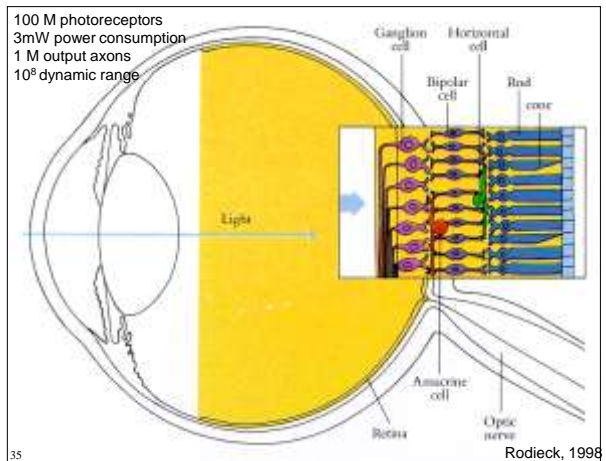

35

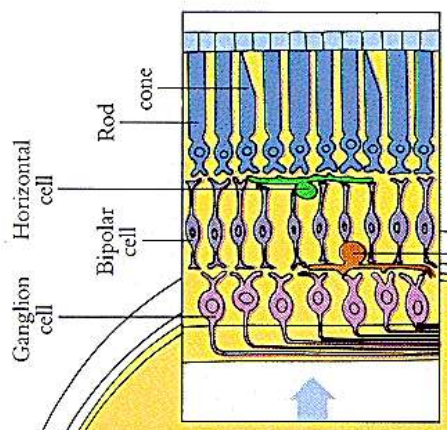


36

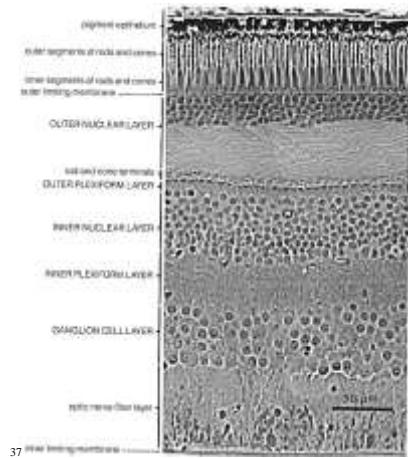


37


Cross section of human retina

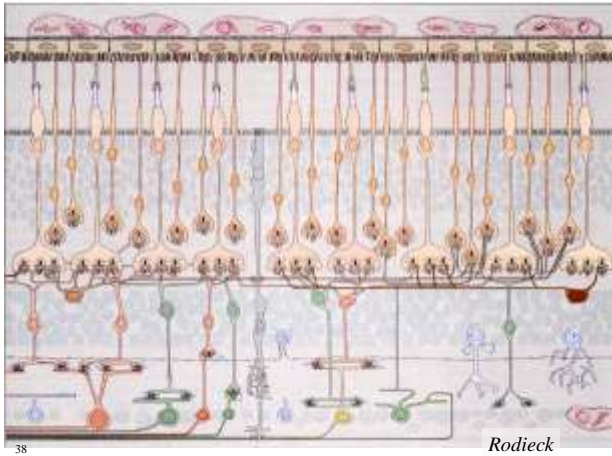

The eyes power supply (arteries)

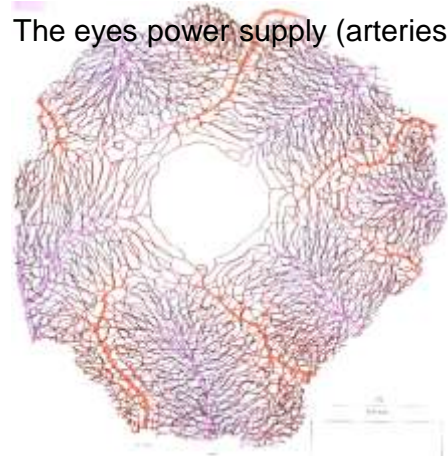

All animals (from insects to us) partition vision into **sustained** and **transient** visual pathways

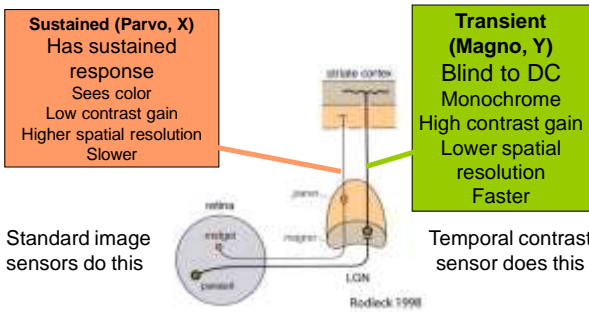


Light ranges

1 lux of sunlight is about 10^4 photons/um/sec

	Direktes Sonnenlicht	100'000 Lux	Camera range Entire range
	Sonniger Tag	10'000 Lux	
	Bedeckter Tag	1'000 Lux	
	Büro	100 Lux	
	Einbrechende Dämmerung	10 Lux	
	Dämmerung	1 Lux	
	Vollmond	0.1 Lux	
	Viertelmond	0.01 Lux	
	Klare mondlose Nacht	0.001 Lux	
	Bedeckte mondlose Nacht	0.0001 Lux	

The photoreceptor mosaic in the eye

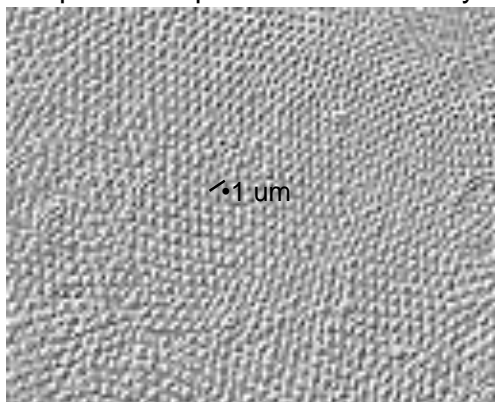


Rodieck 1998
The first steps in seeing

43

Biological photoreceptors adapt their operating point and gain

Organizing principle: Use **Context** to **Normalize** signal

Organizing principle: Use **adaptation** to **amplify novelty**

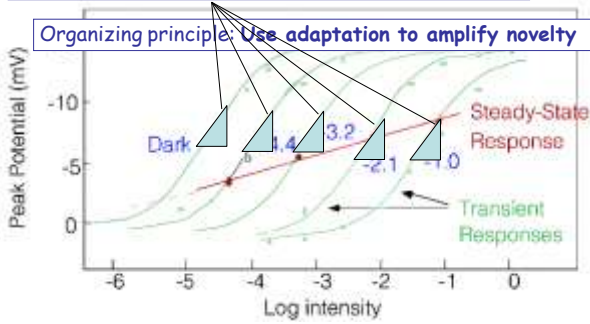

44


Norman & Perlman 1979

$\log(Intensity)$ is self-normalizing and automatically preserves reflectance differences, by normalizing away the constant illumination term in the product of (scene reflectance) * (illumination)

$$d(\log X) = dX/X$$


45

Biological phototransduction uses distributed chain of amplifiers

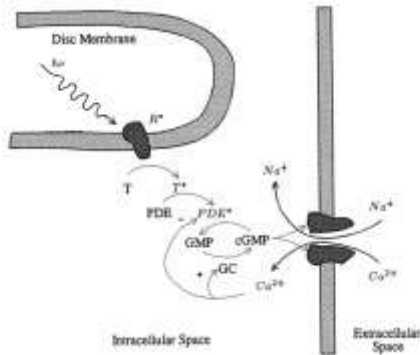


46

Mahowald, 1992

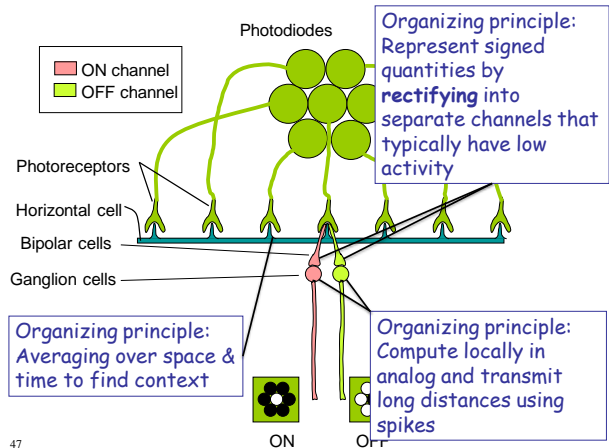


47

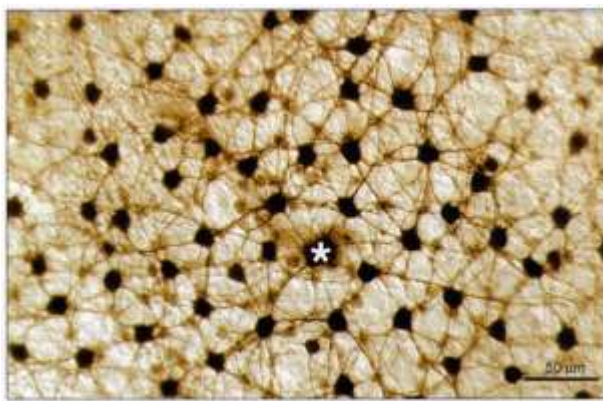

48


HI horizontal cells labeled following injection of one HI cell (*) after Dacey, Lee, and Stafford, 1996

Rectification

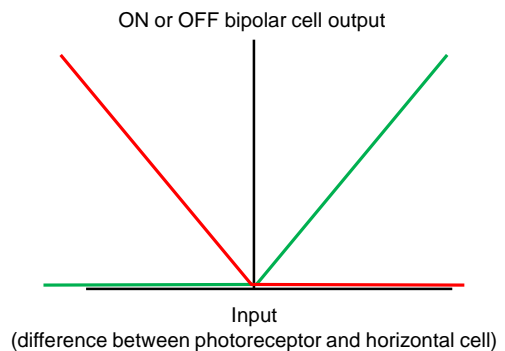


49

Physio Friend Layout

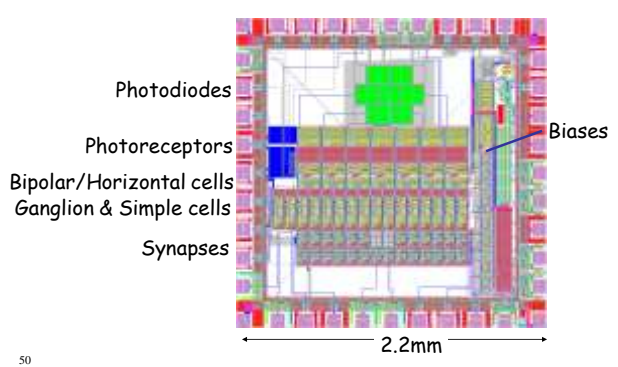


50

Physiologist's Friend circuit

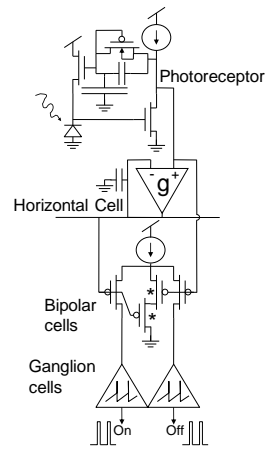


51

Adaptive Photoreceptor Circuit



52


Adaptive photoreceptor (1993)

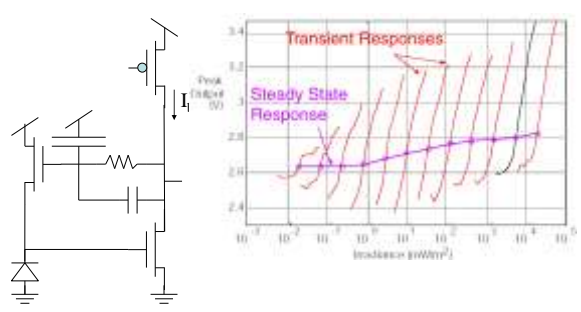

53


Horizontal cell

Follower-aggregator averages the photoreceptor outputs to compute the average of the inputs. This average is the *context* which is compared to.

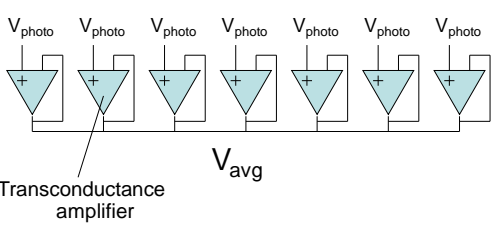


The follower-aggregator computes **mean** for small signals and **median** for large signals

54

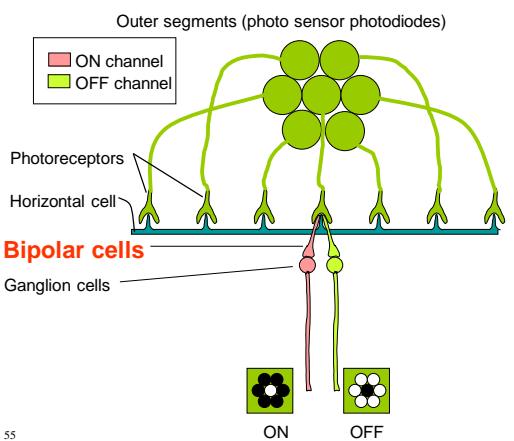


55

DVS pixel architecture

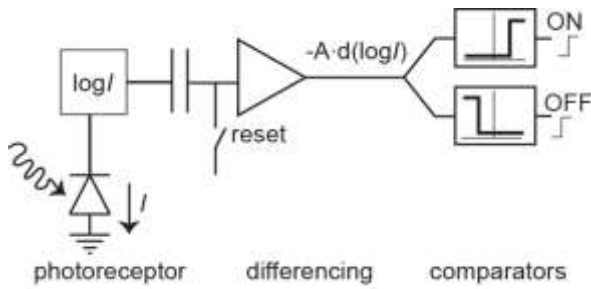


65

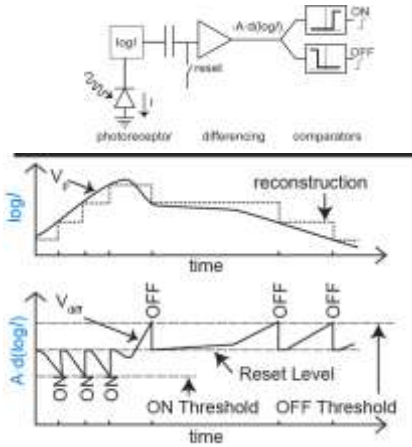

66

Embedded DVS Pencil Balancer

Jorg Conradt, Matt Cook
3 microcontrollers, 600mW

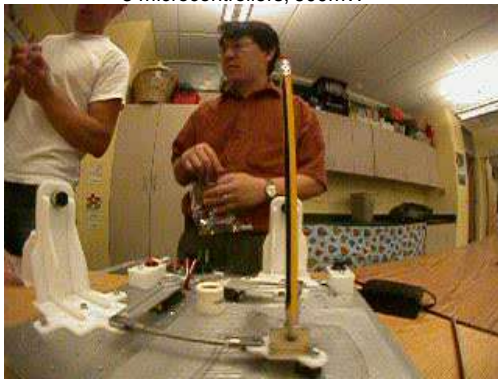

67

Review

- Neuromorphic Engineering (NE)
 - Context of electronics (synchronous logic)
 - Motivation for NE by contrasting computers and brains
- Silicon and the operation of a single transistor
 - CMOS vs. complementary channels in neurons
- The biology of the retina
 - How retinas uses adaptive photoreceptors and horizontal cells, together with bipolar cells, to compute rectified local contrast
 - The Physiologist's Friend Chip
 - The Dynamic Vision Sensor

68